




VINYL CLICK FLOORING

ELEGANCE

Top-Joy International

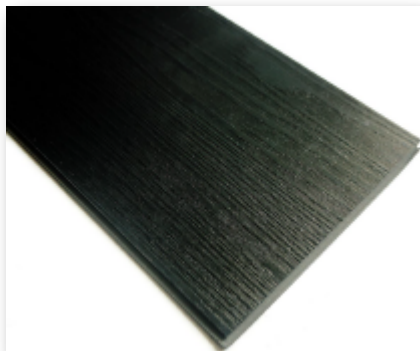

E-W10002S



E-W10003S



E-W10004S



E-JH001S



E-JH002S



E-JH003S



E-JH004S



E-8014S



E-8015S



E-8016S



E-8012S



E-8013S



E-8011S



E-8010S



E-8007S/E-8006S



E-W2003S



E-W2001S



E-W2002S

Vinyl Click Flooring

Top-Joy Elegance Series Vinyl Click Flooring replicates the beauty of natural wood without any of the practical drawbacks of real wood flooring. Designed in 30 combinable patterns, you will find the atmosphere and harmony you want to create. We offer different thickness tiles to meet the needs of the traffic. Not only Elegance is warm and realistic, but also it is highly durable and extremely resistant to scratch thanks to its pure PVC wear layer. Its PU treatment makes the maintenance easy and cost-effective. Elegance is the perfect flooring for shops, hotels, supermarkets, offices but also private homes.

Technical Data

| | |
|----------------|--|
| Dimension | Rectangle Size: 6"x36", 4"x36",12"x24" Square Size: 12"x12",18"x18" |
| Thickness | 4.0mm, 5.0mm, 6.0mm |
| Backing Type | Interlock |
| Surface Finish | Glossy, matte, semi-matte |

| Safety Criteria | Standard | Value |
|--|-------------|-------|
| Flammability | EN13501-1 | Bfl |
| Slip Resistance | EN13893 | DS |
| Formaldehyde Emission | EN717-1 | None |
| Castor Wheel Test | EN425 | Pass |
| Color Fastness | ISO 105-BO2 | ≥6 |
| Determination of migration of heavy metals | EN71 | None |

| Performance | Standard | Value |
|--------------------------------|----------|---------------------|
| Wear Resistance | EN-660-2 | ≤0.015g |
| Flexibility | EN435 | No damage |
| Curling After Exposure To Heat | EN434 | ≤1.2mm(80 °C ,6Hrs) |
| Peel Resistance | EN431 | ≥2.8Kg/2cm |
| Dimensional Stability | EN434 | ≤0.12%(80 °C ,6Hrs) |
| Residual Indentation | EN434 | ≤0.1mm |